Miniature Potentiometers

小型ポテンショメータ

FEATURES
● Conform RoHS

特　長
● RoHS適合品です。

V09LEPVN	(Example): V09LEPVN 5.5T-15A10K
	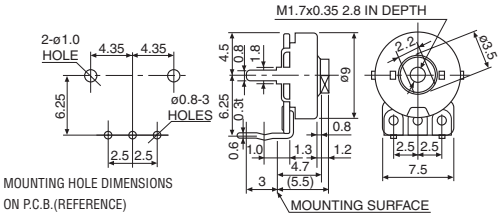

SPECIFICATIONS

Total Rotational Angle 全回転角度	230±5°
Rotational Torque 回転トルク	1-20mN・m
Resistance Range 全抵抗値範囲	1kΩ - 500kΩ (taper B) 5kΩ - 250kΩ (taper 15A)
Total Resistance Tolerance 全抵抗値許容差	Within±20% of the nominal total resistance
Rated Power 定格電力	0.05W (taper B) 0.025W (taper 15A)
Maximum Operating Voltage 最高使用電圧	AC10V, DC10V

V105-4EPVBN	(Example): V105-4EPVBN 5.5T-15A10K
	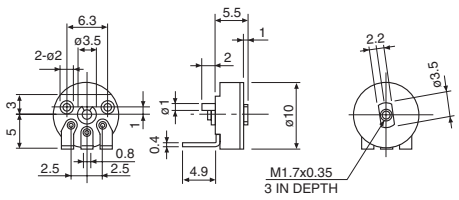

SPECIFICATIONS

Total Rotational Angle 全回転角度	200±10°
Rotational Torque 回転トルク	2-15mN・m
Resistance Range 全抵抗値範囲	1kΩ - 500kΩ (taper B) 1kΩ - 500kΩ (taper 15A)
Total Resistance Tolerance 全抵抗値許容差	Within±20% of the nominal total resistance
Rated Power 定格電力	0.07W (taper B) 0.03W (taper 15A)
Maximum Operating Voltage 最高使用電圧	AC100V, DC100V (taper B) AC70V, DC70V (taper 15A)

XVB93 Series

● Conform RoHS

● RoHS適合品です。

XVB93PHPN
Single-Element


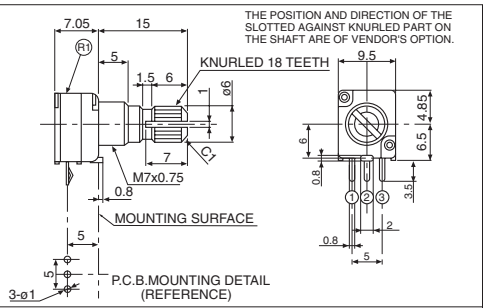

XVB93S (C97ST)
With Rotary Switch

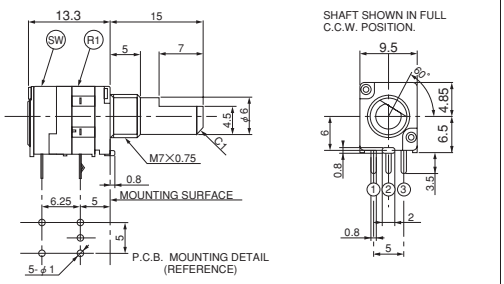

XVB93S (D98SG)
(With Push-Momentary Switch)


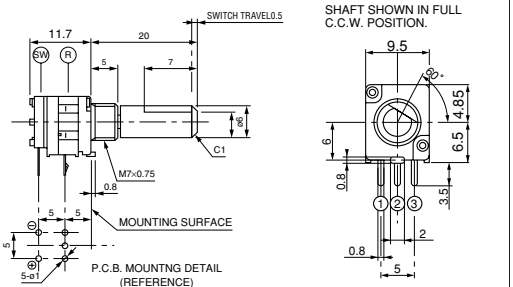

XVB93M1N
Push-Lock mechanism


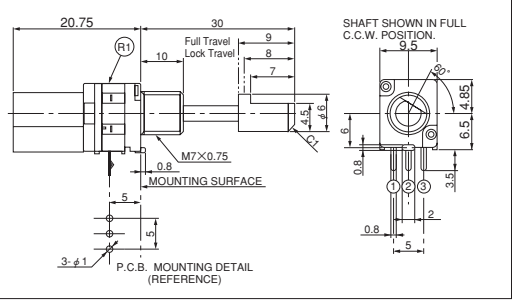

SPECIFICATIONS

Total Rotational Angle 全回転角度	300±5°
Rotational Torque 回転トルク	Single Shaft Type : 2 to 15 mN·m
Nominal Total Resistance 公称全抵抗値	20kΩ, 50kΩ, 100kΩ
Total Resistance Tolerance 全抵抗値許容差	Within±20% of the nominal total resistance
Resistance Taper 抵抗変化特性	1B, 3B, 15A
Rated Power 定格電力	0.05W
Maximum Operating Voltage 最高使用電圧	AC50V, DC10V

Switch Rating: DC16V 3A (SPST)

Switch Rating: DC12V 0.5A (SPST)

Push-Lock mechanism



NOBLE

● Specifications in this catalog are presented basically for informative purposes. We request the exchange of official approval drawings before placing order.

● 当カタログは参考仕様ですので、ご使用にあたっては正式納入仕様書の取り交わしをお願いします。