

Cement-Filled Fixed Resistors  
RGG, RGB series

セメント充填固定抵抗器 巻き線タイプ

FEATURES

- Being an incombustible insulated type, will not start a fire when overloaded. Assures a high level of safety.
- Conform RoHS

特長


- 不燃絶縁形です。過負荷に対して発火がなく安全性が高くなっています。
- RoHS適合品です。

TYPE DESIGNATION

品名構成

Example of indicating Order Number

注文番号の記載例

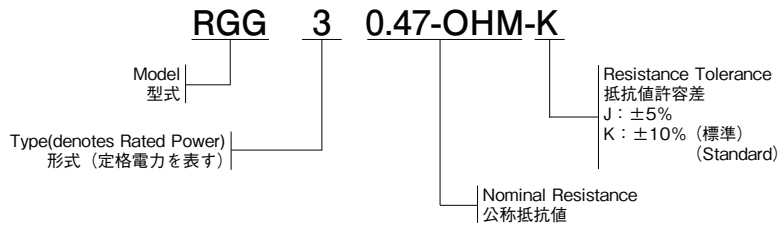

DIMENSIONS/RATING

外形寸法/定格

<b>RGG</b> 	
<b>RGB</b> 	
<b>RGB PS</b> <b>RGB PW</b> (Snap-in terminal) 	
<b>RGB HS, RGB HV</b> With Bracket (Lug Terminal) HS Bracket Type HV Bracket Type 	

Model	Rated Power (W)	Resistance Range (Ω)E12	Dimensions (mm)				
			A	B	C	F	φd
RGG2/RGGS2	2	0.22-270	11	7	21	5	0.8
RGG3/RGGS3	3	0.27-680	12	8	26	5	0.8
RGG5/RGGS5	5	0.27-680	13	9	26	5	0.8
RGG7/RGGS7	7	0.68-1,200	13	9	38.5	5	1.0
RGG10/RGGS10	10	1-1,800	16	13	35	7.5	1.0
RGG20/RGGS20	20	1.5-2,700	20	13	45	7.5	-

The RGG 20 terminal forms differ so consult us for further details.  
(Example):RGG2-10-OHM-K

Model	Rated Power (W)	Resistance Range (Ω)E12	Dimensions (mm)		
			A/B	C	φd
RGB2/RGBS2	2	0.22-270	6.3	18	0.8
RGB3/RGBS3	3	0.27-680	8	23	0.8
RGB5/RGBS5	5	0.27-680	9.5	23	0.8
RGB7/RGBS7	7	0.68-1,200	9.5	36	0.8
RGB10/RGBS10	10	1-1,800	9.5	48	0.8
RGB15/RGBS15	15	1.2-2,200	13	48	1.0
RGB20/RGBS20	20	1.5-2,700	13	63.5	1.0

(Example):RGB2L-10-OHM-K



Model	Rated Power (W)	Resistance Range (Ω)E12	Dimensions (mm)			
			A/B	C	E	F
RGB5PS/RGBS5PS	5	0.27-680	9.5	28	10	15
RGB7PS/RGBS7PS	7	0.68-1,200	9.5	36	10	22.5
RGB10PS/RGBS10PS	10	1-1,800	9.5	48	10	35
RGB15PS/RGBS15PS	15	1.2-2,200	13	48	15	33
RGB20PS/RGBS20PS	20	1.5-2,700	13	63.5	15	49
RGB5PW/RGBS5PW	5	0.27-680	9.5	28	22	15
RGB7PW/RGBS7PW	7	0.68-1,200	9.5	36	22	22.5
RGB10PW/RGBS10PW	10	1-1,800	9.5	48	22	35
RGB15PW/RGBS15PW	15	1.2-2,200	13	48	30	33
RGB20PW/RGBS20PW	20	1.5-2,700	13	63.5	30	49

(Example):RGB5PS-10-OHM-K

Model	Rated Power (W)	Resistance Range (Ω)E12	Dimensions (mm)					
			A/B	C <sub>1</sub>	C <sub>2</sub>	D <sub>1</sub>	D <sub>2</sub>	φd
RGB10H/RGBS10H	10	1-1,800	9.5	48	48	25	28.5	4
RGB15H/RGBS15H	15	1.2-2,200	13	48	57	28.5	27	4
RGB20H/RGBS20H	20	1.5-2,700	13	63.5	63.5	28.5	27	4
RGB30H/RGBS30H	30	1.8-2,200	19	75	83	38	36	4.2
RGB40H/RGBS40H	40	2.2-2,700	19	90	90	38	36	4.2

HS is equipped with a horizontal mounting bracket, and HV with a vertical mounting bracket.

(Example):RGB20HS-10-OHM-K

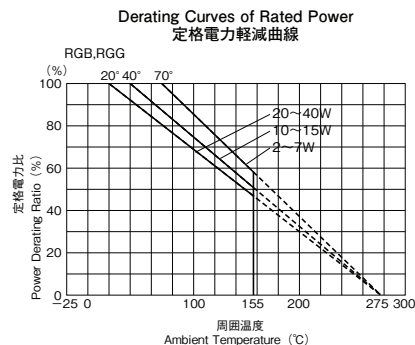

- Specifications in this catalog are presented basically for informative purposes. We request the exchange of official approval drawings before placing order.
- 当カタログは参考仕様ですので、ご使用にあたっては正式納入仕様書の取り交わしをお願いします。