

DERATING CURVE OF RATED POWER

定格電力軽減曲線

Where a higher ambient temperature is involved, derate the continuous power rating (shown in Table 1) as per the Rated Power Derating Curves of Rated Power below.

周囲温度が高くなるに従って、連続定格電力 (Table-1) を軽減して下さい。

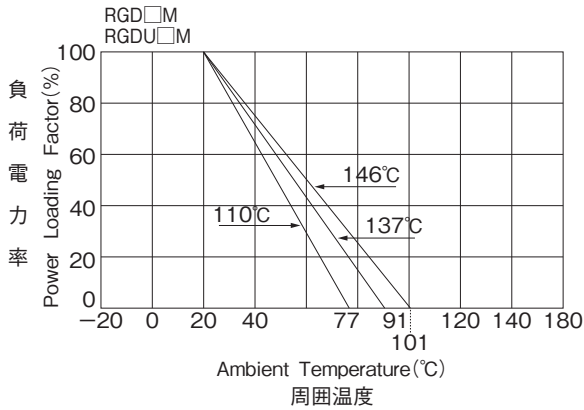


Table 1

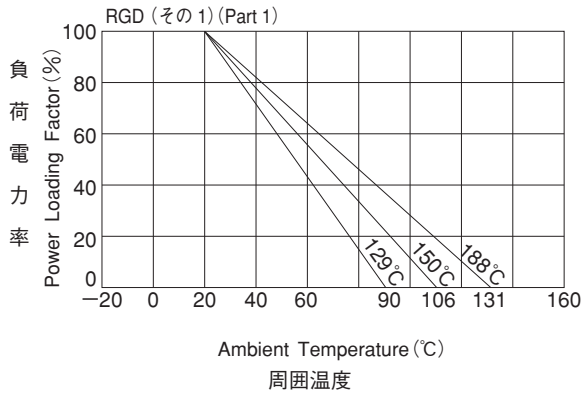


Table 2

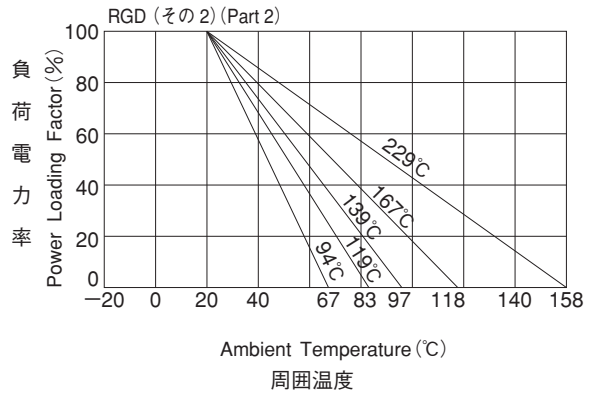


Table 3

Cement-Filled Fixed Resistors  
RGGT series

セメント充填固定抵抗器 酸金皮膜

FEATURES

- Being an incombustible insulated type, will not start a fire when overloaded. Assures a high level of safety.
- Conform RoHS

特長


- 不燃絶縁形です。過負荷に対して発火がなく安全性が高くなっています。
- RoHS適合品です。

TYPE DESIGNATION

品名構成


Example of indicating Order Number

注文番号の記載例

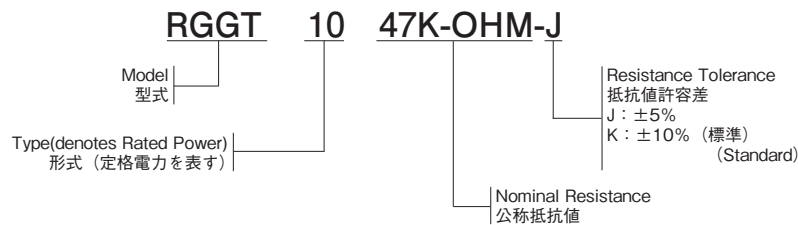

DIMENSIONS/RATING

外形寸法/定格

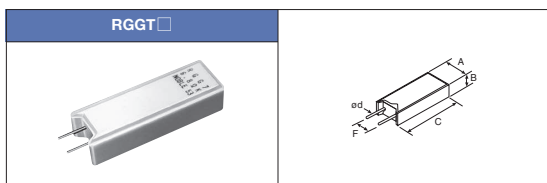

Model	Rated Power (W)	Resistance Range (Ω)E12	Dimensions (mm)				
			A	B	C	F	φd
RGGT7	7	10-120k	13	9	38.5	5	1.0
RGGT10	10	10-120k	16	13	35	7.5	0.8

The RGG 20 terminal forms differ so consult us for further details.  
(Example):RGG2-10-OHM-K

- Specifications in this catalog are presented basically for informative purposes. We request the exchange of official approval drawings before placing order.
- 当カタログは参考仕様ですので、ご使用にあたっては正式納入仕様書の取り交わしをお願いします。